



1st edition 2024

ACOUSTIC

MAGAZINE



MAY 2024 - FIBROTECH.CO.UK - ACOUSTIC PANELS AND WOOD-WOOL - MAGAZINE INSPIRATION BY TREETOPS A/S - BY KINGSPAN, DENMARK

CASE

OUR FLAT WAS GIVEN WARMTH AND LIFE

UNLIKE ANYTHING ELSE..... 13

CASE

WE COULD NOT HAVE CHOSEN MATERIALS MORE BEAUTIFUL

BEAUTIFUL AND DEEP COLOURS..... 14

FREE INSPIRATION FOR HOME AND BUSINESS

ACOUSTIC MAGAZINE

1st edition 2024



QUANTI Light Oak



Multi Fine White



SQUARE Oiled Oak



Grey Oak

FIBROTECH

BY TREE TOPS

- 04 INSPIRATION
- 08 **ACOUSTIC PANELS PREMIUM (BASIC) / PROFF**
- 10 **ACOUSTIC PANELS UNIKA**
- 12 **ACOUSTIC PANELS LIGHT ACOUSTIC**
- 13 **CASE/**
OUR FLAT WAS GIVEN WARMTH AND LIFE SAYS AHMED MOHAMMED - AND THE OUTCOME SPEAKS FOR ITSELF
- 14 **CASE/**
WE COULD NOT HAVE CHOSEN MATERIALS MORE BEAUTIFUL - HEAR CAMILLA TELL ABOUT HER EXPERIENCE WITH ACOUSTIC PANELS FROM FIBROTECH
- 15 **ACOUSTIC PANELS QUANTI**
- 16 INSTALLATION - ACOUSTIC PANELS
- 17 **ACOUSTIC PANELS SQUARE**
- 18 **ACOUSTIC PANELS STONE**
- 19 FSC® / SUSTAINABILITY - ACOUSTIC PANELS
- 20 TECHNICAL INFORMATION - ACOUSTIC PANELS
- 22 **WOOD-WOOL ACOUSTIC CEMENT BOARDS** - CHOOSE FROM 5 VARIANTS
- 24 TECHNICAL INFORMATION - WOOD WOOL CEMENT BOARDS
- 26 STORAGE AND HANDLING - WOOD WOOL CEMENT BOARDS
- 32 VISUALIZER / CONTACT / DEALERS







Black Oak



Smoked Oak



UNIKA White Platinum



SQUARE Walnut



Walnut



UNIKA White Platinum

FIBROTECH ACOUSTIC **PANELS**

are free of knots, have a uniform look and create straight lines
Wide slats: 25 mm

PREMIUM (BASIC): 7 COLOURS - 22 X 605 X **2440** mm

PROFF: 7 COLOURS - 22 X 605 X **3000** mm

PROFF SIGNATUR: 1 COLOUR - 22 X 605 X **3000** mm



Light Oak

Smoked Oak

Oiled Oak

Grey Oak



Black Oak

Walnut

Ash

PROFF SIGNATUR
Light Oak



BASIC
2440 mm

**PROFF/
SIGNATUR**
3000 mm



COMPLETION LISTS for PROFF, PREMIUM (BASIC) AND SQUARE

DB	Dimensions	Colour	Pieces /per packet.
2109947	22X25x3000 mm	Grey Oak	2
2109946	22X25x3000 mm	Light Oak	2
2109945	22X25x3000 mm	Oiled Oak	2
2109944	22X25x3000 mm	Smoked Oak	2
2109943	22X25x3000 mm	Walnut	2
2109942	22X25x3000 mm	Ash	2
2171189	22X25x3000 mm	Black Oak	2



← **COMPLETION LISTS 3000 mm** →



Reach new heights with
PROFF ACOUSTIC
PANELS

Grey Oak

ACOUSTIC PANELS **UNIKA** FOR OFTEN WIPING

Foiled MDF

Acoustic panels in the UNIKA serie consist of a 9 mm back plate in recycled polyester and slats of foil-wrapped MDF. This makes UNIKA Acoustic Panels extremely easy to wipe and clean. This type of acoustic panels is particularly suitable for all rooms with a relative humidity below 55%, e.g., bathrooms, kitchens, counters and headboards, where the need for cleaning and wiping is larger - though not in direct contact with water. When setting up the Acoustic Panels in a wet room, the ends must be sealed with a clear lacquer.



UNIKA Light Oak



UNIKA White Platinum

UNIKA 25 - 7 COLOURS - 22 X 600 X 2440 mm

UNIKA 35 - 1 COLOUR - 22 X 600 X 2440 mm



Light Oak **25**

Smoked Oak **25**

Oiled Oak **25**

Grey Oak **25**




Black Oak **25**

Walnut **25**


White Platinum **25**

Light Oak **35**

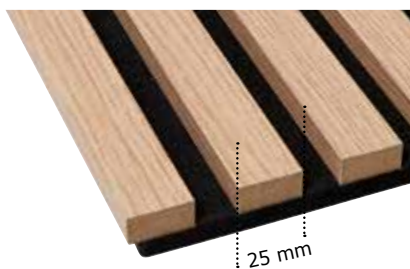

UNIKA 25

Wide slats: 25 mm

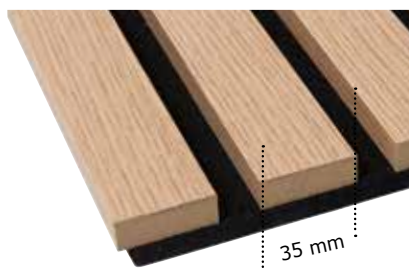

UNIKA 35

Wide slats: 35 mm



COMPLETION LISTS for UNIKA

DB	Dimensiones	Colour	Pieces per packet.
2275298	22x25x3000 mm	Grey Oak	2
2275297	22x25x3000 mm	Light Oak	2
2275296	22x25x3000 mm	Oiled Oak	2
2275295	22x25x3000 mm	Smoked Oak	2
2275294	22x25x3000 mm	Walnut	2
2275299	22x25x3000 mm	Black Oak	2

ACOUSTIC PANELS

LIGHT ACOUSTIC



As the name tells, these acoustic panels are thinner, as slats are glued directly onto the polyester, eliminating the need for MDF. The lightweight acoustic panels are flexible and can be installed around corners. They are delivered in packages of five pieces each in five color variations.

5 COLOURS - 9 X 600 X **2500** mm - Wide slats: 25 mm



Light Oak



Smoked Oak



Oiled Oak



Grey Oak



Walnut



Light Oak



Light Oak

LIGHT ACOUSTIC

5 pieces per packet

5 COLOURS

- Light Oak
- Smoked Oak
- Oiled Oak
- Grey Oak
(only by request)
- Walnut
(only by request)





Oiled Oak



“THE CHOICE OF COLOUR FELL ON THE OILED PANEL”

- says Mohammed Ibrahim - and the outcome speaks for itself



We chose acoustic panels because we had seen them in a magazine and felt that it was something we had to try.

We knew from the beginning that we wanted to try out something different, something unique that you wouldn't normally see.

The choice fell on the oiled panel. We felt that this colour would match our mitred herringbone flooring and our kitchen. The colour would also break up the white walls and add warmth and life to the rooms.

Why FibroTech?

We contacted our local dealer and told them about our ideas. They immediately

recommended TreeTops as the supplier for the project - with the product FibroTech.

Expectations were high. We wanted to add a wow effect to our already unique flat (flat worthy of preservation). The old style would be mixed with a modern style, but with respect intact.

We had a local tradesperson install the panels although they were extremely easy to work with. The challenge was the flat that had very uneven walls because of its advanced age. But the outcome was great and speaks for itself.

We're so happy with the results. We enjoyed working with TreeTops and would recommend them and this unique product any time.

“WE COULD NOT HAVE CHOSEN A HIGH-QUALITY PRODUCT MORE BEAUTIFUL”

– says Camilla Thomsen



Smoked Oak

Right from the beginning of our building project, we’ve been very aware of materials, colours and the aesthetic look which we wanted in our future house.

We like natural materials in particular, and that also characterises our house. We find that the warm colours help create a pleasant and personal atmosphere which many new houses often lack with their many white walls and high-ceilinged rooms.

We therefore knew for sure that we would like to have acoustic panels several places in our new house. In addition to the clearly improved acoustics, the panels from FibroTech are also very beautiful and create an amazing “depth” in a room!

100% free of knots

We therefore fell for these panels as they are 100% free of knots and create a calm and uniform look. We chose the colour “Smoked Oak” with the most beautiful, dark and deep colour. Quite perfect for the hotel atmosphere that we wanted in our bedroom but also for our wardrobe niche in our entrance.

We also liked the idea of the black polyester backing that is made of recycled plastic, so the environment has also been considered.

Easy to install

The acoustic panels are also easy to install. We chose the solution with black screws

at the top and bottom. We started installing the panels at the one side of the wall and worked towards the other side by easily “pushing” the panels together. We had to cut the panels in the bedroom to allow room for the power sockets at both sides of the bed. We managed that part quite easily with a finecutter which we also used to shorten the panels in the wardrobe niche.

Our top recommendation to others

We’re so happy about the outcome and wouldn’t want it any other way. We would highly recommend the FibroTech acoustic panels to others considering similar projects at home!

ACOUSTIC PANELS

QUANTI



18 X 520 X 2440 mm - Wide slats: 27 mm

Light Oak is also available with a grey polyester back.



Light Oak

Smoked Oak

Oiled Oak

Grey Oak




Ash

Walnut

Black Oak

Light Oak / Grey Backplate

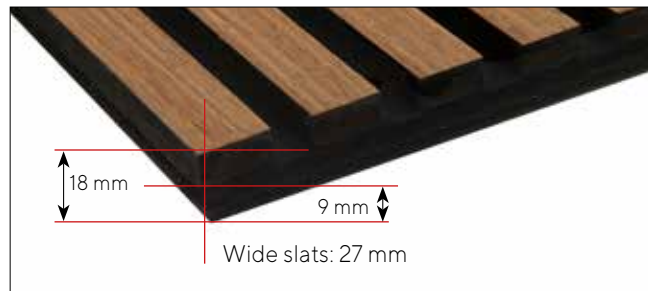

QUANTI:

7 COLOURS - 8 VARIANTS

- Real veneer
- Knot-free
- Easy to install
- Lightweight



QUANTI Black Oak



Before



After

IT'S NOT DIFFICULT

Follow our instructions before installation.

Scan and download our installation instructions and video here:



<https://fibrotech.co.uk/wp-content/uploads/2023/02/TreeTops-Monteringsvejled.-BASIC-Akustikpaneler-GB-NETFIL.pdf>



<https://fibrotech.co.uk/opbevaring-og-montering/>


Result of measurement of sound absorption coefficient

Sound class D(MH)

Sound class A with 45 mm mineral wool

Frekv. (Hz)	Absorptionskoefficient		
	1/3-okt.	1/1-okt.	Ref.-curve
100	-0,04		
125	0,01	0,00	
160	0,06		
200	0,06		
250	0,10	0,10	0,15
315	0,11		
400	0,20		
500	0,28	0,30	0,35
630	0,38		
800	0,55		
1000	0,65	0,70	0,35
1250	0,90		
1600	1,14		
2000	1,24	1,00	0,35
2500	1,23		
3150	1,13	1,00	0,25
4000	1,06		
5000	0,89		

Sound measurement

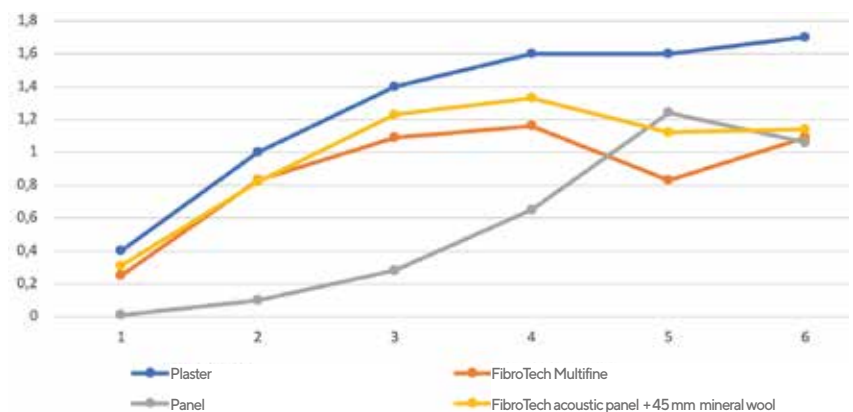

ACOUSTIC PANELS **SQUARE**



22 X 520 X 520 mm - **2 pieces per packet** - Wide slats: 25 mm

DESIGN YOUR OWN ACOUSTIC PATTERN.

With FibroTech Square acoustic panels, you can be your own designer and get creative in so many ways. FibroTech Square acoustic panels are very easy to install yourself - and they can be mounted on all types of walls - with FibroTech adhesive or with panel screws.


FibroTech Square acoustic panels are available in 7 different colors.



Light Oak




Smoked Oak



Oiled Oak



Grey Oak



Ash



Walnut



Black Oak



Ash

SQUARE Grey Oak

ACOUSTIC PANELS

STONE 18 X 520 X 2440 mm

Wide slats: 25 mm

3 designs with black back panel / 1 design with grey back panel



The surface of Marble White is laminated on 3 sides and does not absorb moisture, making it suitable for bathrooms and other areas that require frequent wiping – though not in direct contact with water.

The ends of the panels must be sealed with a clear lacquer during installation in wet rooms.



STONE 4 PATTERNS

- Concrete Stone
- Marble White Stone
- Pattern Stone
- Rusty Stone



FibroTech **STONE**
- this you need to experience yourself

STONE Pattern



The mark of responsible forestry
Ask for our FSC®-certified products

ECO LABEL

For sustainable forestry

FibroTech products are FSC®-certified. That means that the wood used comes from sustainable forests.

There is no illegal wood cutting, and no endangered woodland is eliminated.



THE BLACK POLYESTER BACKING IS GREEN

– as it is made of recycled plastic!

The essential and effective backings of FibroTech’s panels are made of recycled plastic with respect and consideration for our planet.



ACOUSTIC PANELS TECHNICAL INFORMATION

FibroTech acoustic panels gives you a beautiful ceiling and a grand wall - as well as a sound-absorbing surface for improved acoustics in the room.

The look is warm and the indoor climate comfortable.

FibroTech's acoustic panels are available in BASIC, PROFF and UNIKA. BASIC and PROFF are both made of polyester, MDF and genuine wood veneer, adding a

beautiful look without knots and with various markings. BASIC and PROFF acoustic panels can be installed in any kind of rooms except for wet rooms - see UNIKA.

Naturally, they are 100% FSC and EPD -certified. The polyester on the backing is made of recycled plastic.

For acoustic panels in the bathroom or any other room where surfaces are often wiped, FibroTech has a whole series for that purpose - the UNIKA serie. The

serie is made of recycled polyester, film and a wrapped MDF, making it extremely easy to wipe off and clean. It is therefore suitable for any type of wet room, kitchens, counters, headboards etc.

All panels can be installed on walls and as ceilings, horizontally as well as vertically - the decision is yours.


Install the panels in existing, fire security-approved buildings by spot-gluing and/or attaching with screws.

How FibroTech stops sound

The narrow wooden strips are installed on a 9 mm polyester panel that does not reflect sound the way hard material would.

If you need further noise reduction (sound class A), you can place 45 mm of mineral wool behind the panels.

FibroTech's thick polyester backing absorbs the sound, improves acoustics in the room - and makes all the difference

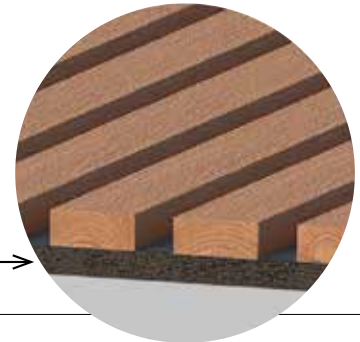

Facts

- More variants
- 9 mm polyester panel on the back
- FSC® and EPD®-certified
- Up to 3000 mm panels
- Install as ceilings or on walls
- Slat spacing 15 mm



Adhesive

DB No.: 2119000 Catridge: 300 ml
DB No.: 2119001 Bucket: 2.5 kg

Properties

Data on tolerance for standard acoustic panels



SUBSTAN	TOLERANCE	
Polyester: B1	Length (mm):	+/- 2
	Width (mm):	+/- 2
	Thickness (mm):	+/- 2
	Weight (%):	+/-10
	Perpendicularity (mm):	+/- 2
	Flatness (mm):	+/- 3

Screws

100 pieces per box.



DB No.: 2297827
Product and colour : FibroTech panel screw Tx. 20
Dimension: 4,2 x 30 mm
Colour: Black - RAL 9005

DB No.: 2315193
Product and colour: FibroTech panel screw Tx. 20
Dimension: 4,2 x 30 mm
Colour: Grey - RAL 7047

DB No.: 2395799
Product and colour: FibroTech panel screw Tx. 20
Dimension: 4,0 x 25 mm
Colour: Black - RAL 9005
 (Only by request)



Product range FibroTech **Acoustic panels**

DB no.	Product and colour	Dimensions m ² /panel	Weight per panel
PREMIUM (BASIC)			
2035570	FibroTech acoustic panel Smoked Oak	22x605x2440 mm	1,46 13,5 kg.
2035571	FibroTech acoustic panel Grey Oak	22x605x2440 mm	1,46 13,5 kg.
2035576	FibroTech acoustic panel Oiled Oak	22x605x2440 mm	1,46 13,5 kg.
2035577	FibroTech acoustic panel Walnut	22x605x2440 mm	1,46 13,5 kg.
2035578	FibroTech acoustic panel Light Oak	22x605x2440 mm	1,46 13,5 kg.
2035731	FibroTech acoustic panel Ash	22x605x2440 mm	1,46 13,5 kg.
2162519	FibroTech acoustic panel Black Oak	22x605x2440 mm	1,46 13,5 kg..
PROFF			
2151323	FibroTech acoustic panel Smoked Oak	22x605x3000 mm	1,82 16,84 kg.
2151340	FibroTech acoustic panel Grey Oak	22x605x3000 mm	1,82 16,84 kg.
2151335	FibroTech acoustic panel Oiled Oak	22x605x3000 mm	1,82 16,84 kg.
2151330	FibroTech acoustic panel Walnut	22x605x3000 mm	1,82 16,84 kg.
2122780	FibroTech acoustic panel Light Oak	22x605x3000 mm	1,82 16,84 kg.
2151347	FibroTech acoustic panel Ash	22x605x3000 mm	1,82 16,84 kg.
2162520	FibroTech acoustic panel Black Oak	22x605x3000 mm	1,82 16,84 kg.
PROFF SIGNATUR			
2122779	Acoustic panel Light Oak	22x605x3000 mm	1,82 16,84 kg.
UNIKA			
2166677	UNIKA 25 FibroTech acoustic panel Smoked Oak	22x600x2440 mm	1,46 13,5 kg.
2166676	UNIKA 25 FibroTech acoustic panel Grey Oak	22x600x2440 mm	1,46 13,5 kg.
2166675	UNIKA 25 FibroTech acoustic panel Oiled Oak	22x600x2440 mm	1,46 13,5 kg.
2166678	UNIKA 25 FibroTech acoustic panel Walnut	22x600x2440 mm	1,46 13,5 kg.
2166674	UNIKA 25 FibroTech acoustic panel Light Oak	22x600x2440 mm	1,46 13,5 kg.
2166679	UNIKA 25 FibroTech acoustic panel Black Oak	22x600x2440 mm	1,46 13,5 kg.
2306452	UNIKA 25 FibroTech acoustic panel White Platinum	22x600x2440 mm	1,46 13,5 kg.
2166603	UNIKA 35 FibroTech acoustic panel Light Oak	22x600x2440 mm	1,46 13,5 kg.
LIGHT ACOUSTIC - 5 pieces per packet			
2039667	Light Acoustic acoustic panel Smoked Oak	9x600x2500 mm	1,50 2,9 kg.
2039668	Light Acoustic acoustic panel Oiled Oak	9x600x2500 mm	1,50 2,9 kg.
2039666	Light Acoustic acoustic panel Light Oak	9x600x2500 mm	1,50 2,9 kg.
2039669	Light Acoustic acoustic panel Grey Oak (Only by request)	9x600x2500 mm	1,50 2,9 kg.
2039670	Light Acoustic acoustic panel Walnut (Only by request)	9x600x2500 mm	1,50 2,9 kg.
QUANTI			
2353324	QUANTI acoustic panel Light Oak - Polyester: Black	18x520x2440 mm	1,27 10,4 kg.
2353325	QUANTI acoustic panel Light Oak - Polyester: Grey	18x520x2440 mm	1,27 10,4 kg.
2353326	QUANTI acoustic panel Black Oak	18x520x2440 mm	1,27 10,4 kg.
2353327	QUANTI acoustic panel Walnut	18x520x2440 mm	1,27 10,4 kg.
2353328	QUANTI acoustic panel Grey Oak	18x520x2440 mm	1,27 10,4 kg.
2353329	QUANTI acoustic panel Ash	18x520x2440 mm	1,27 10,4 kg.
2353330	QUANTI acoustic panel Smoked Oak	18x520x2440 mm	1,27 10,4 kg.
2353331	QUANTI acoustic panel Oiled Oak	18x520x2440 mm	1,27 10,4 kg.
SQUARE - 2 pieces per packet			
2344635	Acoustic panel Square panel - Smoked Oak	22x520x520 mm	0,27 4,44 kg.
2344636	Acoustic panel Square panel - Grey Oak	22x520x520 mm	0,27 4,44 kg.
2344638	Acoustic panel Square panel - Oiled Oak	22x520x520 mm	0,27 4,44 kg.
2344639	Acoustic panel Square panel - Walnut	22x520x520 mm	0,27 4,44 kg.
2344641	Acoustic panel Square panel - Light Oak	22x520x520 mm	0,27 4,44 kg.
2344644	Acoustic panel Square panel - Ash	22x520x520 mm	0,27 4,44 kg.
2344645	Acoustic panel Square panel - Black Oak	22x520x520 mm	0,27 4,44 kg.
STONE SERIE			
2378304	STONE acoustic panel - RUSTY Stone	18x520x2440 mm	1,27 10,4 kg.
2378305	STONE acoustic panel - CONCRETE Stone	18x520x2440 mm	1,27 10,4 kg.
2378306	STONE acoustic panel - PATTERN Stone	18x520x2440 mm	1,27 10,4 kg.
2378307	STONE acoustic panel - MARBLE WHITE Stone	18x520x2440 mm	1,27 10,4 kg.

WOOD-WOOL ACOUSTIC CEMENT **BOARDS**



DIFFERENT KINDS OF PANELS - THERE ARE MANY POSSIBILITIES.
FIND YOUR INSPIRATION HERE.




White Painted




Unpainted



Black Painted



Grey Cement

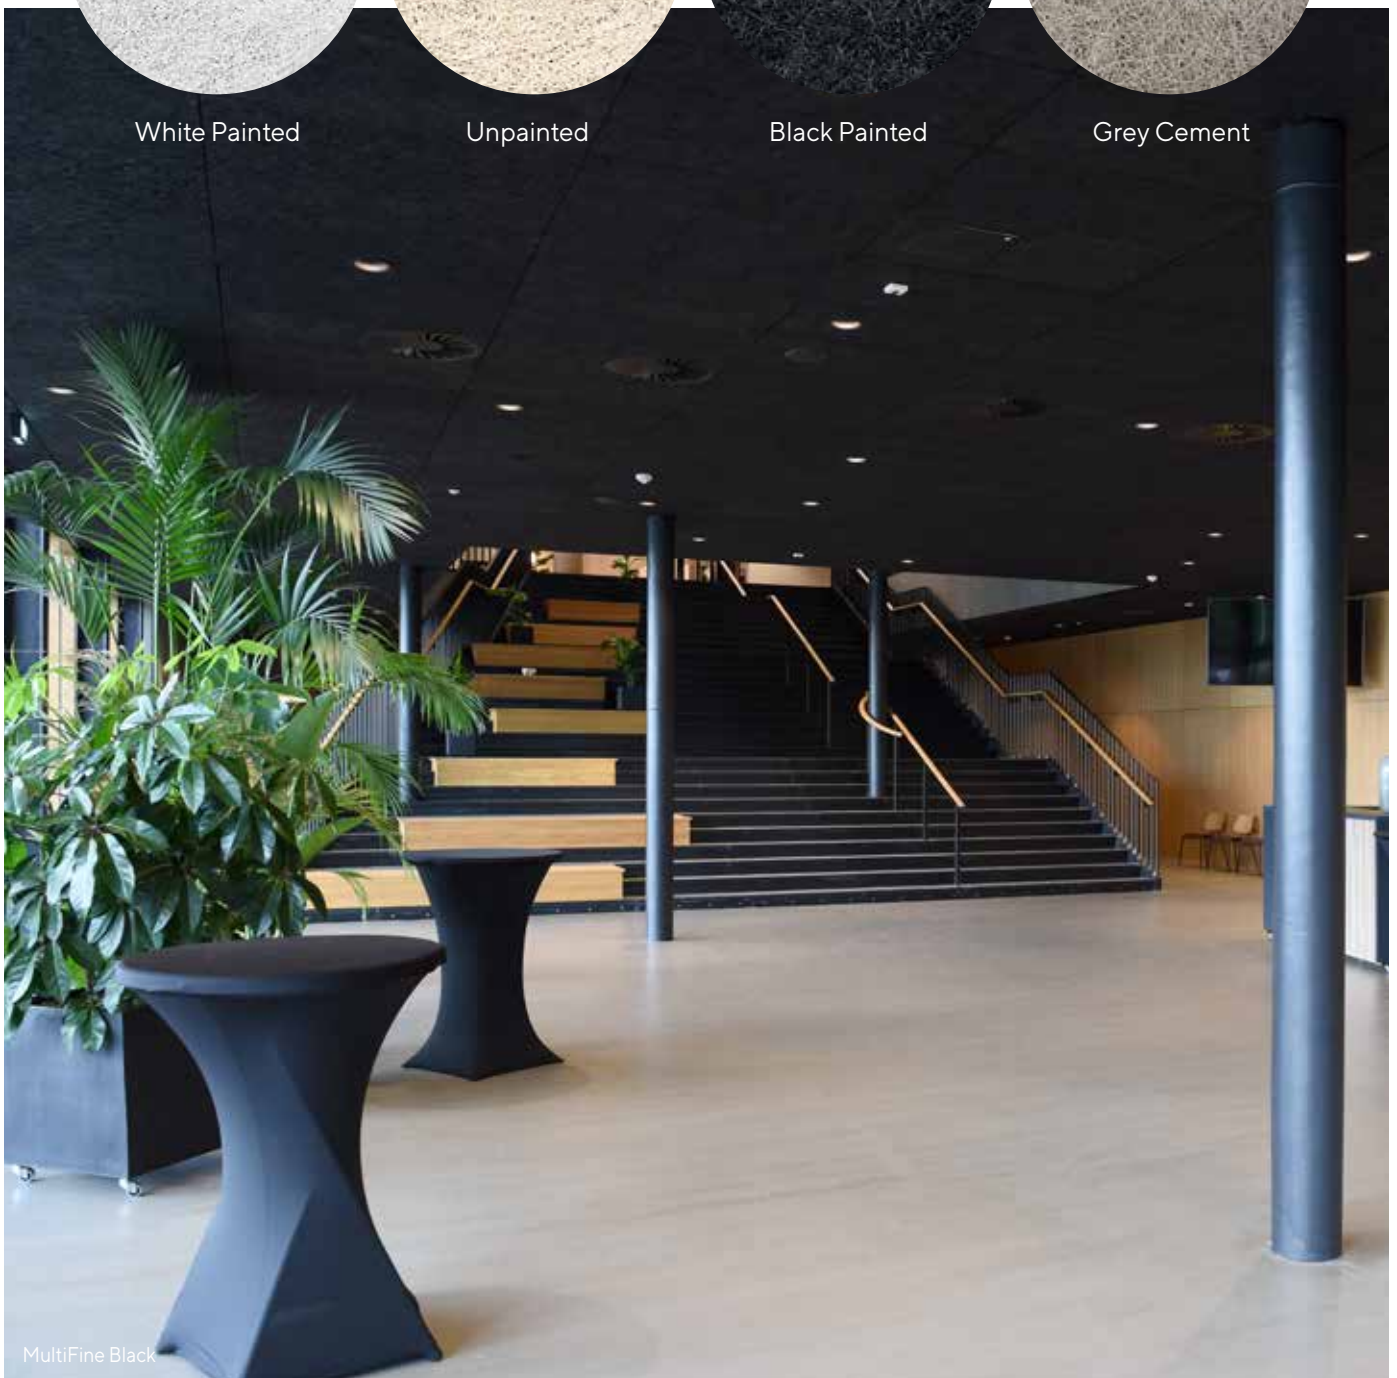

MultiFine Black



WOOD-WOOL ACOUSTIC CEMENT **BOARDS** - FOR ALL CONSTRUCTIONS

- X-tra Fine** The ultimate, finest surface available for a wood-wool cement acoustic ceiling
- MultiFine** A very fine surface almost like the X-tra Fine
- Basic** Fine structure and surface but considered more of a "basic" board
- Mineral wool** A double-layer panel - made of one layer of FibroTech acoustic cement board and a 20-100 mm layer of mineral wool. The mineral wool is lined with a cloth of fleece on the back, and the two boards are glued together with a non-toxic PVA glue
- Barcode** MultiFine wood-wool cement board of the newest design with or without oak wood sticks

TECHNICAL INFORMATION

ACOUSTIC **BOARDS**

FibroTech wood-wool cement adds excellent acoustics to the room. The use of wood-wool cement boards provides acoustics regulation and reduces reverberation.

FibroTech wood-wool cement boards are therefore suitable for any kind of building as lining on inside ceilings, vaulted or not, offices, any room with hard flooring, ceilings, halls, roofed terraces, sports centres, garages, stables etc.

FibroTech wood-wool cement boards are made of wood wool, water and the finest, white cement from Aalborg Portland, combining constructional strength with natural properties.

There are many application possibilities as the panels are available with different edges and in various dimensions and colours.

Acoustic lining not only creates a comfortable sound environment but also provides an improved indoor climate.

All of our cement boards are CE-marked and also meet the fire safety requirements for fire class K₁0 Bs1 - d0.

Facts

- Perfect sound insulation
- Effective fire protection properties
- Healthy indoor climate
- Long durability
- Easy installation
- Many options

FibroTech wood-wool cementboards 100 % natural



Wood



Portland Cement



Water



Wood-wool Touch up paint

FibroTech Touch up paint for wood-wool
350 ml - White - RAL 9003 **DB nr.: 2122782**

FibroTech Touch up paint for wood-wool
350 ml - Black - RAL 9005 **DB nr.: 2122783**

Screws

DB no.	Product	Colour	Dimensions	Pcs.
1838894	FibroTech structural screw TX20	White RAL 9003	5,0 x 45 mm	250
1905470	FibroTech structural screw TX20	White RAL 9003	5,0 x 45 mm	100
1838893	FibroTech structural screw TX20	Beige RAL 1015	5,0 x 45 mm	250
1927440	FibroTech structural screw TX20	Beige RAL 1015	5,0 x 45 mm	100
1936643	FibroTech structural screw TX20	Black RAL 9005	5,0 x 45 mm	100



2297623

FibroTech structural screw TX20



2395797

FibroTech structural screw TX20

(Only by request)

64 mm



White RAL 9003



White RAL 9003


5,0 x 64 mm

100

5,0 x 80 mm

75

80 mm



Variants and dimensions / Board thickness: 25 mm

DB no.	Product and colour	Bevel	Dimensions	Wood-wool/mm	m ² /panel	Pcs./pallet
1950317	FibroTech X-tra Fine white-painted	5 mm	600x1200 mm	0,5	0,72	80
1838891	FibroTech Multifine white-painted	5 mm	600x1200 mm	1,0	0,72	80
1936366	FibroTech Multifine black-painted	5 mm	600x1200 mm	1,0	0,72	80
1838892	FibroTech Multifine unpainted	5 mm	600x1200 mm	1,0	0,72	80
1838805	FibroTech Basic light/fine	5 mm	600x1200 mm	1,5	0,72	80
1838829	FibroTech Basic light/fine	11 mm	600x2400 mm	1,5	1,44	40
1838883	FibroTech Basic light /fine white-painted	5 mm	600x1200 mm	1,5	0,72	80
1838885	FibroTech Basic light /fine white-painted	11 mm	600x2400 mm	1,5	1,44	40
2334118	FibroTech Basic grey cement (Only by request)	5 mm	600x1200 mm	1,5	0,72	80
2122785	FibroTech Barcode, white		600x1200 mm	1,0	0,72	80
2122786	FibroTech Barcode, black		600x1200 mm	1,0	0,72	80
2122787	FibroTech Barcode Sticks Oak, Untreated and oven dried		14x10x1200 mm			12 pcs. /packet
				m²/per box (18 pcs. per box)		m²/each
2132446	FibroTech Hexagon Box - white - RAL 9003		289x250 mm	0,972		0,054
2132448	FibroTech Hexagon Box - black - RAL 9005		289x250 mm	0,972		0,054
2132449	FibroTech Hexagon Box - beige - RAL 1015		289x250 mm	0,972		0,054
2132450	FibroTech Hexagon Box - grey - RAL 7004		289x250 mm	0,972		0,054
2119000	FibroTech installation adhesive cartridge, 300 ml.					
2119001	FibroTech installation adhesive bucket, 2,5 kg.					
Mineral Wool	FibroTech mineral wool - available for the following panel types: Basic / Multifine / X-tra Fine Colour: White-painted / unpainted Mineral wool thickness: 20 - 100 mm		600x1200 mm		0,72	40

Properties

The chart shows the tolerance which we declare according to EN13168 which is the standard for wood-wool cement.



	X-tra Fine, MultiFine and Basic	Farmer	Mineral wool
TOLERANCE			
Length (mm)	+/-2	+/-3	+/-3
Width (mm)	+/-2	+/-3	+/-2
Thickness (mm)	+/-2	+/-3	+/-2
Weight (%)	+/-10	+/-10	+/-10
Perpendicularity (mm)	+/-2	+/-2	+/-2
Flatness (mm)	+/-3	+/-3	+/-3
HEAT			
Lambda-value W/m-K	0,072	0,072	0,072
FIRE			
Reaction to fire	K ₁₀ Bs1-d0	K ₁₀ Bs1-d0	K ₁₀ A2-s1-d0
SUBSTANCES			
Formaldehyde	E1	E1	E21
STANDARD			
Declared according to	EN13168	EN13168	EN13168

ACOUSTIC PANELS

STORAGE AND HANDLING

FibroTech wood-wool cement should always be stored indoors. Allowing fresh air to and from the panels is important to keep them ventilated and prevent them from absorbing moisture.


Before installation, remove all plastic and distribute the panels with bearers between each panel to begin acclimatisation.

The panels must be acclimatised for at least 12 days. Do not use alternative solutions such as hot air generators or the like. It is important that the panels adjust to the room temperature and humidity before installation.

To prevent the panels from contracting, do not install the FibroTech panels until the construction has been entirely closed off.

If possibly, wait until painting has been completed as paint releases moisture for the panels to absorb. FibroTech is oven dried from the factory but may have been exposed to external factors allowing the panels to absorb moisture causing a risk of the panels contracting after installation.

FibroTech wood-wool cement must be stored horizontally on a pallet or on a minimum of 4 bearers.

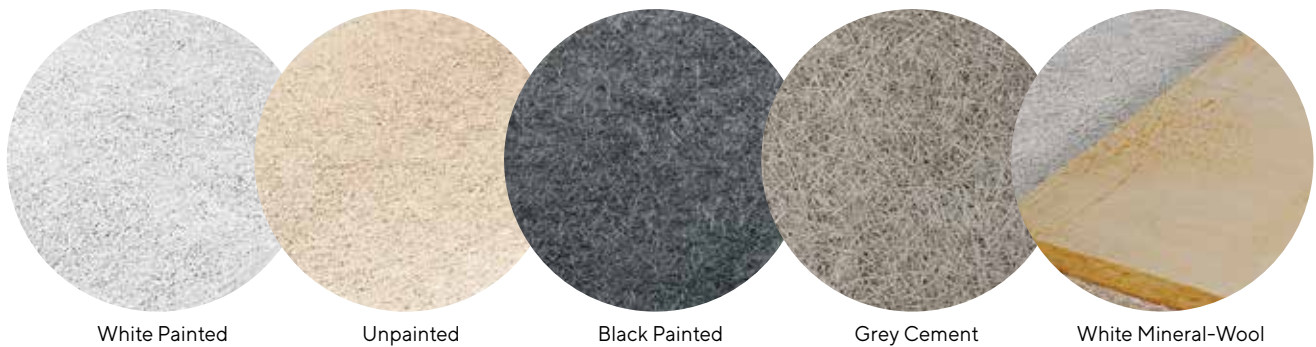


White Painted

Unpainted

Black Painted

Grey Cement

White Mineral-Wool

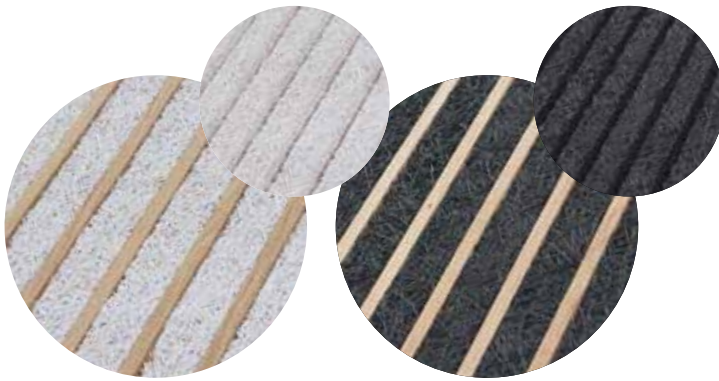


FibroTech Barcode, white

FibroTech Barcode, black



Hexagon

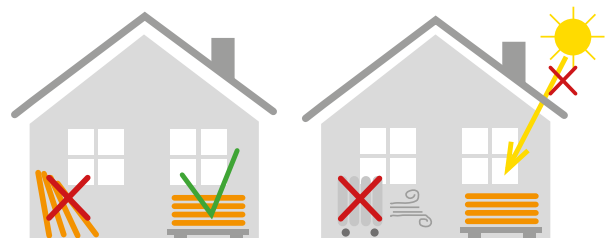

DOES THAT SOUND A LITTLE CRAZY?


- well, yes, but FibroTech wood-wool cement boards make those noisy sounds disappear

When children's voices, music and grown-up talk combine in the kitchen, having a conversation is sometimes quite difficult. High-ceilinged rooms and hard surfaces such as mortar-

washed brick, cement or glass make sound reflect between walls and ceilings. This causes echoes and reverberation which may be highly annoying and wearisome.

FIBROTECH
BY TREX TOPS

INSPIRATION

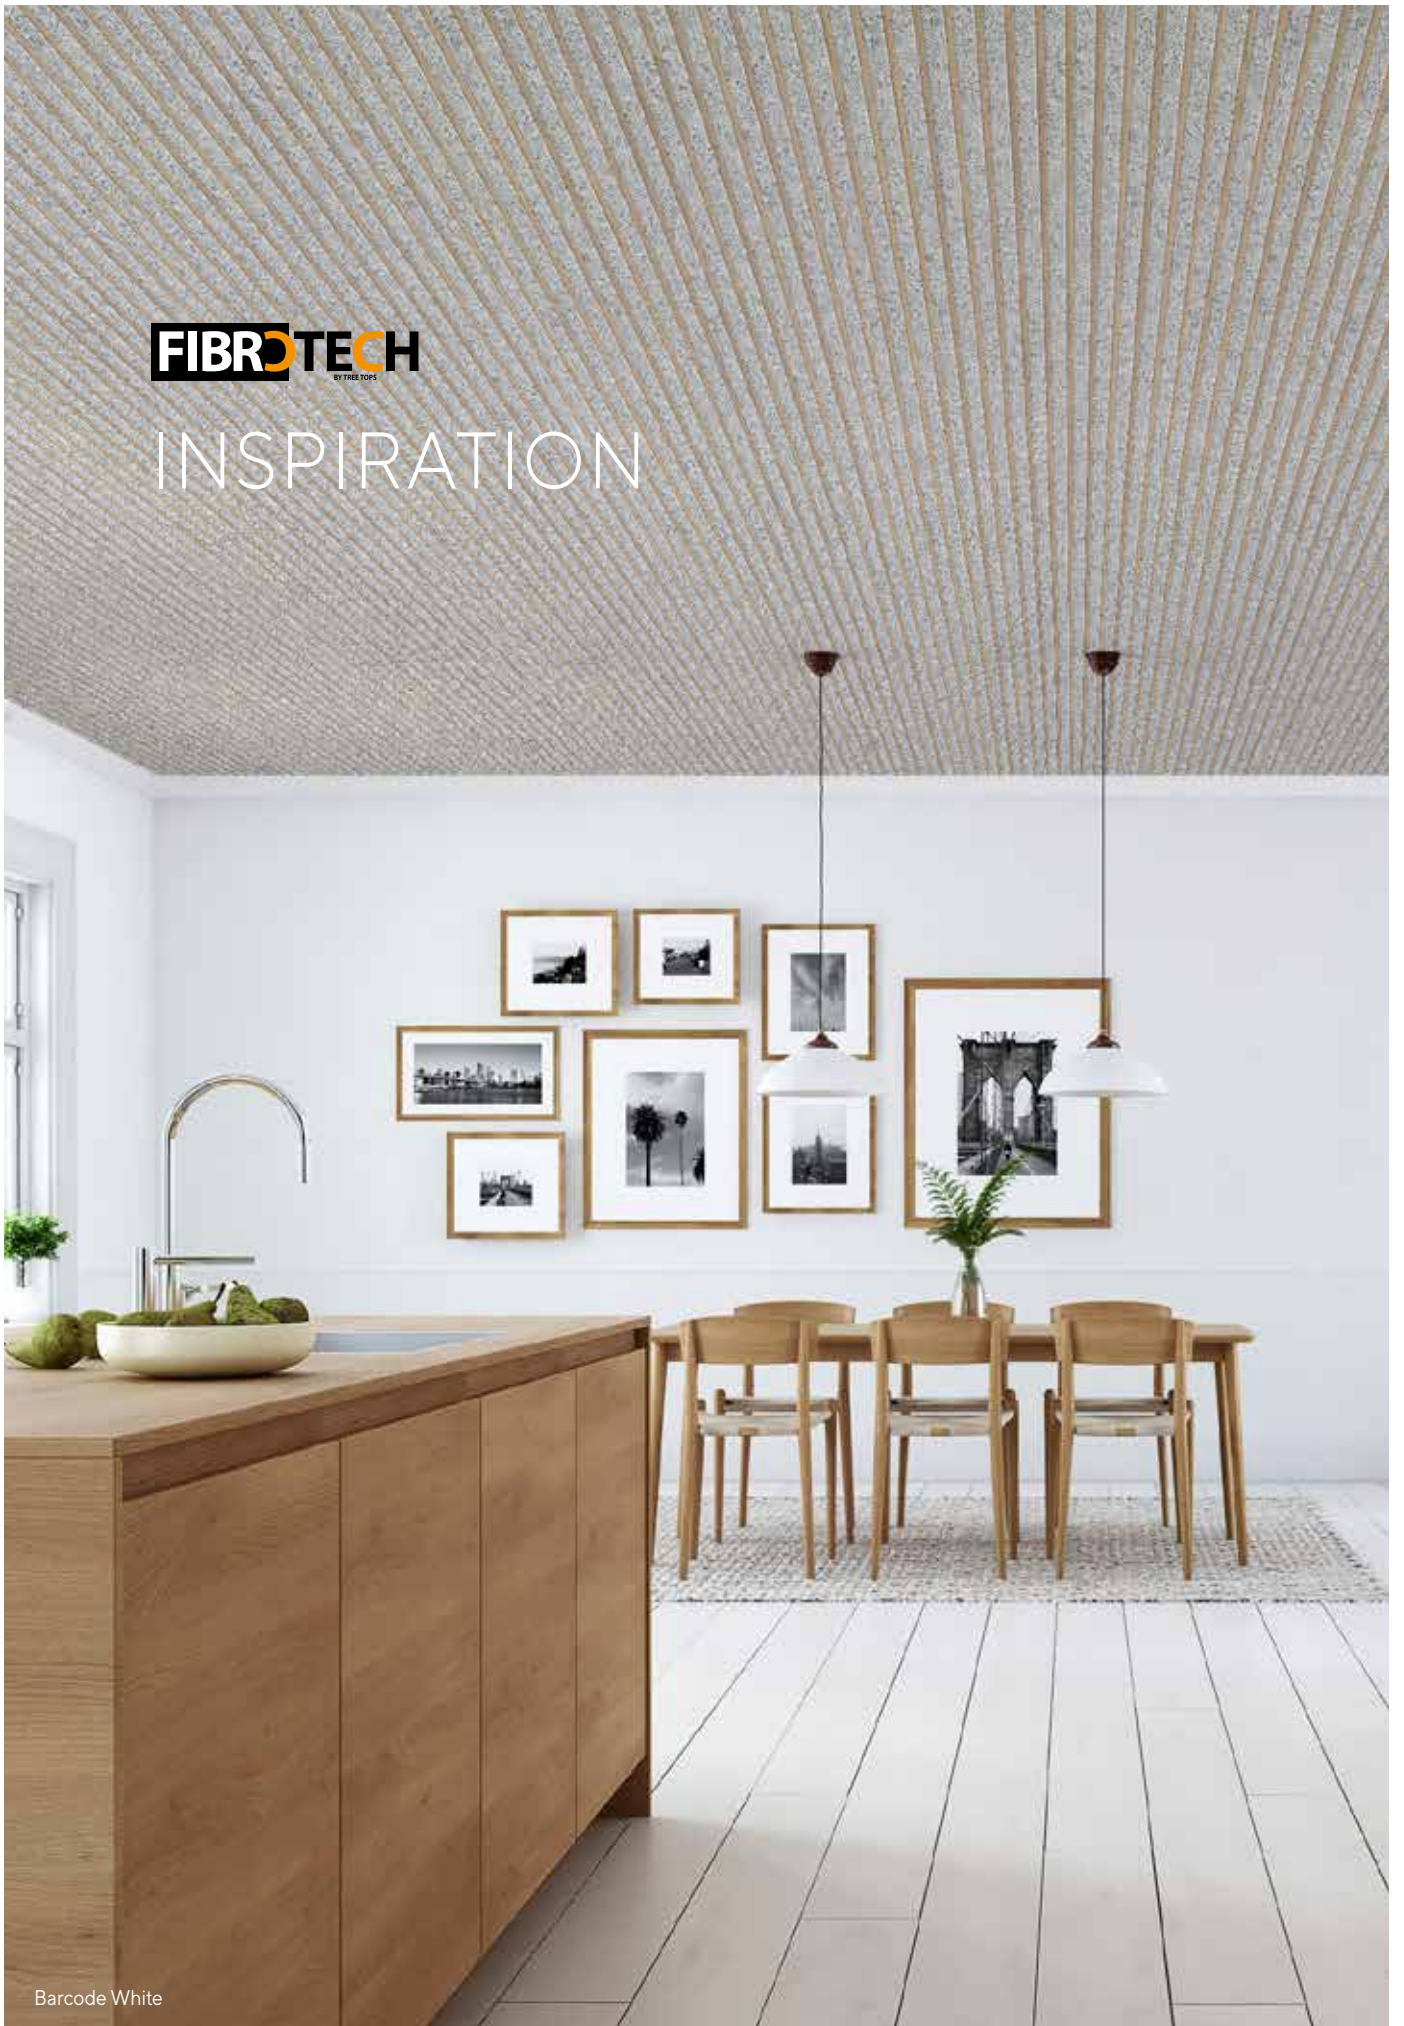

Barcode White



INSPIRATION





STONE Concrete



Grey Oak



The mark of responsible forestry

See the acoustic panels in your home - before buying!

Would you like to see what the acoustic panels look like in your home?
- try out the FibroTech Visualizer at www.fibrotech.co.uk

The visualizer can be used on computers, tablets and phones.

Take a picture of your own wall, upload, or select a picture from the photo library
- and see the difference. Have fun!




Open Visualizer at FibroTech.co.uk



*Find a picture in your library,
or take a picture of your wall*



*See your wall with FibroTech
acoustic panels*



**SCAN AND TRY
OUT FIBROTECH
VISUALIZER**

TreeTops A/S
Bavnevej 32
DK-6580 Vamdrup

Tel. +45 70 266 233
www.fibrotech.co.uk